

32-Port USB-C Charging Cart - 18W per Port

USB-C PD Fast-Charging with 32 Bays for Chromebooks, Tablets & Phones up to 16", 576 W Total, Surge Protection, Integrated Ventilation, Metal Housing, Black

SKU: 102353 | EAN-13: 0766623102353 | UPC: 766623102353

Charging Cart - a mobile charging solution for hospitality, educational environments and more

Visitors, guests and employees bring their mobile devices to all sorts of venues. Give your patrons a way to charge the drained batteries of their Chromebooks, smartphones or tablets with the Manhattan 32-Port USB-C Charging Cart - 576 W. It's the ideal solution for storing and charging portable electronic devices in restaurants, schools, gyms, doctor’s offices, universities, hotels, car rental agencies and more.

Fast-charging with state-of-the art device safety

Mobile users want their devices back quickly. Thanks to Power Delivery 3.0 technology on all 32 USB-C ports, they won’t have to wait long. With power per port up to 3 A / 18 W, this Charging Cart gets smartphones, tablets and other USB devices ready to go in no time. Its use of USB PD 3.0 technology means the ports can charge Chromebooks. The front-mounted LEDs show you when a battery is fully charged. Two additional AC outlets and one USB-A port on the back let you charge devices externally without having to open the Charging Cart. The safety mechanisms in this Charging Cart also help carry the responsibility of safely powering your expensive devices with protection against overload, overcurrent, short circuit, voltage spikes and even lightning strikes.

Physical security is key

The sturdy, durable steel housing and key locks help keep devices secure. Its heavy-duty caster wheels let you roll it to the area you need it. A built-in fan and ventilation slots dissipate heat and keep all devices cool.

Organized and versatile

Keep your devices organized in the 32 bays that offer plenty of space (404 x 27.6 x 283 mm each), even for bulky cases and Chromebooks up to 16". Use the cable management built into the dividers to structure your charging cables. As this Charging Cart features USB-C ports instead of AC outlets, you do not need additional wall chargers. The AC input on the back is a C14 connector that lets you replace the included power cable with other cables based on your region.

Features:

- Safely stores and charges up to 32 Chromebooks, tablets, smartphones and other USB devices up to 16"
- USB-C Power Delivery (PD 3.0) charging ports with power up to 3 A / 18 W per port and 576 W total
- Protection against overload, overcurrent, short circuit, voltage spikes and lightning strikes
- Combined steel and safety-glass door on the front
- LED indicators for easy status monitoring
- Sturdy, secure, powder-coated metal housing; 3-point door lock on front; two included keys
- Spacious device bays (404 x 27.6 x 283 mm each) with cable management built into the dividers
- Suitable for all iPad® models, MacBook Air® up to 15", and Chromebooks® up to 16"
- Integrated fan and ventilation slots for maximum airflow and cooling efficiency
- Built-in handle and four heavy-duty wheels (not removable)
- Round edges to avoid injuries in busy environments

For more information on Manhattan products, consult your local dealer or visit www.manhattan-products.com.
All names of products or services mentioned herein are trademarks or registered trademarks of their respective owners. Distribution and reproduction of this document, and use and disclosure of the contents herein, are prohibited unless specifically authorized.

- Earthing kit included
- Power cables with C13 to EU and to UK plug, 2 m, included
- Ideal for use with Manhattan USB-C charging cables like #356213 or #354868
- Three-year warranty

Specifications:

Standards and Certifications
• PD 3.0
• CE
• RoHS
• UKCA

Electrical
• AC input: 110.0 - 240.0 V; 16 A; 50 - 60 Hz
• USB-C output: 5.0 - 12.0 V; maximum 3.0 A; 18.0 W; 32 output ports with 576.0 W total
• Voltage/current settings (maximum):
  - USB-C:
  - 5.0 V / 3.0 A
  - 9.0 V / 2.0 A
  - 12.0 V / 1.5 A

Protection Characteristics
• Short-circuit (SCP) with auto-recovery mode
• Overvoltage (OVP) with auto-recovery mode
• Overcurrent (OCP) — current limit: 150% (max)

Physical
• Housing: cold-rolled, powder-coated steel
• Polycarbonate safety-glass door
• LED status indicators
  - blue: charging
  - white: fully charged
• Four heavy-duty casters (not removable)
• Unit dimensions (D x W x H): 504 x 639 x 984 mm
• Slot dimensions (D x W x H) (32): 404 x 27.6 x 283 mm
• Total internal storage space per shelf (D x W x H): 400 x 540 x 275 mm
• AC power cable length: 2 m
• Net weight: 49 kg
• Gross weight: 73 kg
• Caster details
  - Wheel materials: PVC/PU
  - Wheel diameter: 125 mm
  - Caster width: 32 mm
  - Caster height: 155 mm
  - Plate size: 92 x 62 mm
  - Hole spacing: 72 x 45 mm
  - Bracket thickness: up to 3 mm
  - Load capacity: 100 kg


Operating Environment
• Operation temperature: 0 - 45°C (32 - 113°F)
• Storage temperature: -15 - 45°C (-5 - 113°F)
• Humidity (noncondensing): 20 - 80%

Package Contents
• 32-Port USB-C Charging Cart - 576 W
• Two AC Power cables, 2 m, C19 to EU and UK plug
• Instructions

For more information on Manhattan products, consult your local dealer or visit www.manhattan-products.com.
All names of products or services mentioned herein are trademarks or registered trademarks of their respective owners. Distribution and reproduction of this document, and use and disclosure of the contents herein, are prohibited unless specifically authorized.





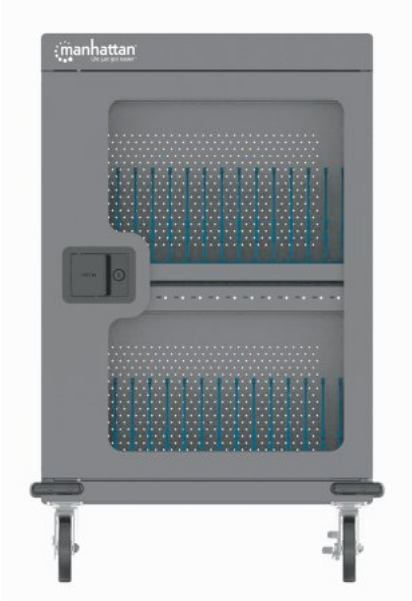





For more information on Manhattan products, consult your local dealer or visit www.manhattan-products.com.
All names of products or services mentioned herein are trademarks or registered trademarks of their respective owners. Distribution and reproduction of this document, and use and disclosure of the contents herein, are prohibited unless specifically authorized.



For more information on Manhattan products, consult your local dealer or visit www.manhattan-products.com.
All names of products or services mentioned herein are trademarks or registered trademarks of their respective owners. Distribution and reproduction of this document, and use and disclosure of the contents herein, are prohibited unless specifically authorized.