

# 8K@60Hz USB-C to DisplayPort 1.4 Adapter Cable

USB-C Male to DisplayPort Male, 3 m (9.84 ft.), Supports 4K@120Hz, Gold-plated Contacts, Black

SKU: 354851 | EAN-13: 0766623354851 | UPC: 766623354851

---

**The DisplayPort Adapter Cable - connect a notebook, MacBook®, smartphone or tablet to a DisplayPort monitor**

If you own a modern laptop or MacBook, you've noticed the lack of AV ports to connect a display. The Manhattan DisplayPort Adapter Cable opens up your connectivity options to link to a DP monitor, TV or projector through your device's USB-C port. Its superior DisplayPort 1.4 standard delivers images in brilliant 8K (7680 x 4320) at rapid 60 Hz or 4K UHD at blazing fast 120 Hz with HDR10 for perfect contrast and colors. But it doesn't end there – if you have a smartphone or tablet that supports DP Alt Mode, you can connect it and take content from your mobile device to the big screen. Triple shielding and gold-plated contacts provide maximum conductivity as well as crisp, clear signal transmissions with zero EMI interference.

**Features:**

- Easily connects a USB-C device to a DisplayPort display, monitor or projector
- Supports resolutions 8K@60Hz, 4K@120Hz, 1440p@144Hz (UWQHD), 1440p@165Hz (WQHD) and 1080p@240Hz
- Compatible with any USB-C device that supports DP Alt Mode, including smartphones, Apple® MacBooks®, Chromebooks™, Pixels™, tablets and more
- DisplayPort 1.4 with state-of-the art, future-proof features for high-end gaming and AV applications
- Thunderbolt™ 3 compatible
- HDR10 for superior contrast and brilliant colors
- Up to 32.4 Gbps bandwidth
- Gold-plated contacts for corrosion-free connections
- Triple shielded to reduce EMI and other interference sources
- Unwired Pin 20 to prevent short circuits
- Supports Multi-Stream Transport (MST) to daisy-chain multiple displays
- Uncompressed 32-channel audio
- Fully compliant with DisplayPort High Bit Rate 3 (HBR3)
- Display Stream Compression 1.2 (DSC) for maximum resolution output
- Unidirectional design, can only connect from a USB-C source to a DP display
- Three-year warranty

**Specifications:**

Standards and Certifications
• DisplayPort v1.4
• CE
• RoHS

Connectors
• One DisplayPort 20-pin male
• One USB-C male
• 19 conductors (DP)
• Gold-plated contacts
• Aluminum shell housing


Cable
• 32 AWG
• Triple shielding: aluminum and Mylar braid
• Withstanding voltage: 300 VDC
• Insulation resistance: 5 MOhm

For more information on Manhattan products, consult your local dealer or visit www.manhattan-products.com.
All names of products or services mentioned herein are trademarks or registered trademarks of their respective owners. Distribution and reproduction of this document, and use and disclosure of the contents herein, are prohibited unless specifically authorized.

• Contact resistance: 10 Ohm
• Length: 3 m (9.84 ft.)
• Weight: 243 g (8.57 oz.)

Operating Environment
• Operation temperature: 0 - 40°C (32 - 104°F)
• Storage temperature: -20 - 60°C (-4 - 140°F)
• Humidity (noncondensing): 0 - 96%

Package Contents
• 8K@60Hz USB-C to DisplayPort 1.4 Adapter Cable

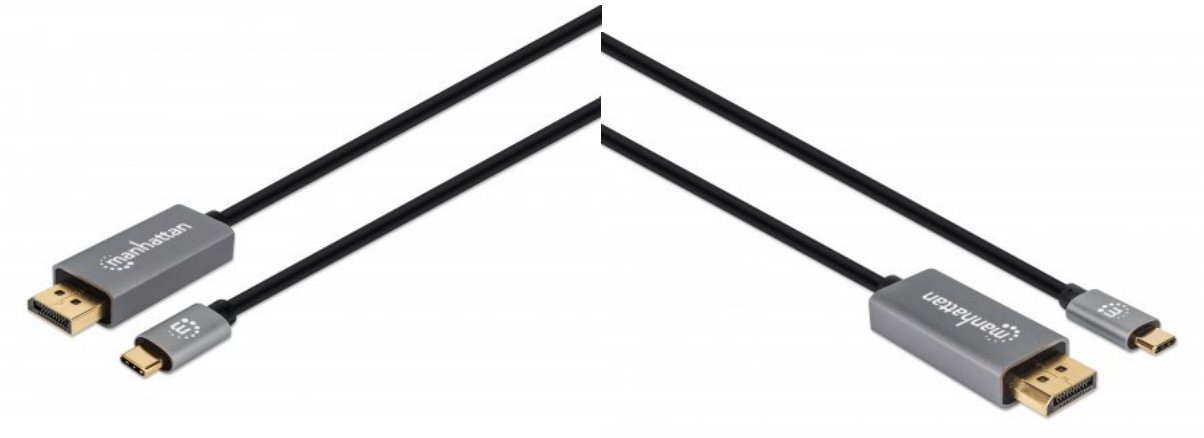









All names of products or services mentioned herein are trademarks or registered trademarks of their respective owners. Distribution and reproduction of this document, and use and disclosure of the contents herein, are prohibited unless specifically authorized.





For more information on Manhattan products, consult your local dealer or visit www.manhattan-products.com.
All names of products or services mentioned herein are trademarks or registered trademarks of their respective owners. Distribution and reproduction of this document, and use and disclosure of the contents herein, are prohibited unless specifically authorized.